


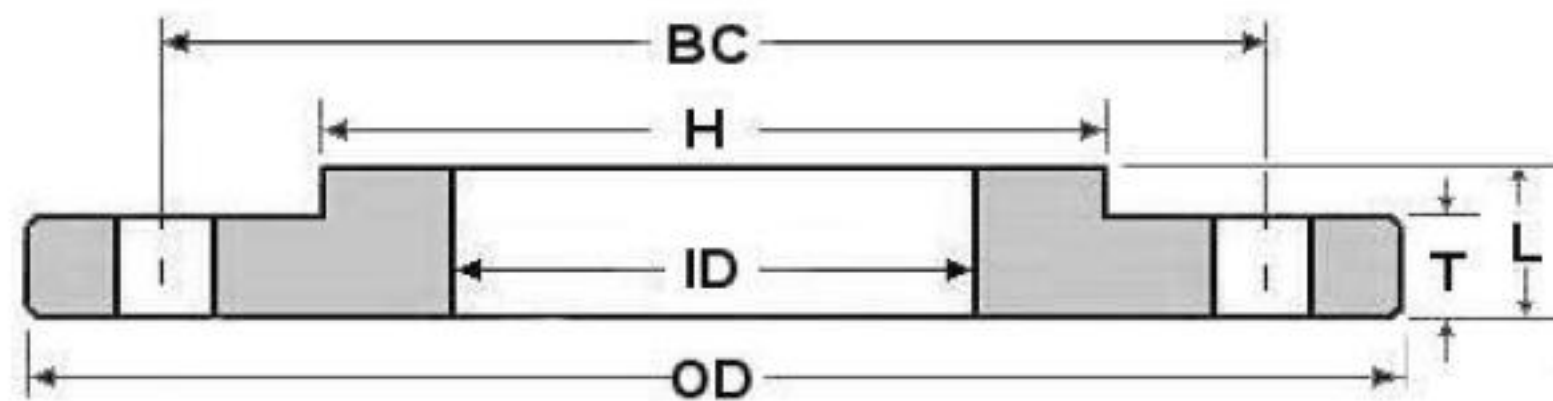

Dimensions			Thickness		Diameter of Hub	Drilling Template		
NPS	OD	ID	Flange T [§]	Overall L		# of Holes	Hole Diam.	BC
4	9.00	4.57	0.938	1.312	5.312	8	0.750	7.50
5	10.00	5.66	0.938	1.438	6.438	8	0.875	8.50
6	11.00	6.72	1.000	1.562	7.562	8	0.875	9.50
8	13.50	8.72	1.125	1.750	9.688	8	0.875	11.75
10	16.00	10.88	1.188	1.938	12.000	12	1.000	14.25
12	19.00	12.88	1.250	2.188	14.375	12	1.000	17.00
14	21.00	14.19	1.375	2.250	15.750	12	1.125	18.75
16	23.50	16.19	1.438	2.500	18.000	16	1.125	21.25
18	25.00	18.19	0.156	2.688	19.875	16	1.250	22.75
20	27.50	20.19	1.688	2.875	22.000	20	1.250	25.00
22	29.50	22.19	1.812	3.125	24.000	20	1.375	27.25
24	32.00	24.19	1.875	3.250	26.125	20	1.375	29.50
26	34.25	26.19	2.000	3.375	28.500	24	1.375	31.75
28	36.50	28.19	2.062	3.438	30.750	28	1.375	34.00
30	38.75	30.19	2.125	3.500	32.750	28	1.375	36.00
32	41.75	32.19	2.250	3.625	35.000	28	1.625	38.50
34	43.75	34.19	2.312	3.688	37.000	32	1.625	40.50
36	46.00	36.19	2.375	3.750	39.250	32	1.625	42.75
38	48.75	38.19	2.375	3.750	41.750	32	1.625	45.25
40	50.75	40.19	2.500	3.875	43.750	36	1.625	47.25
42	53.00	42.19	2.625	4.000	46.000	36	1.625	49.50
44	55.25	44.19	2.625	4.000	48.000	40	1.625	51.75
46	57.25	46.19	2.688	4.062	50.000	40	1.625	53.75
48	59.50	48.19	2.750	4.125	52.250	44	1.625	56.00
50	61.75	50.19	2.750	4.125	54.250	44	1.875	58.25
52	64.00	52.19	2.875	4.250	56.500	44	1.875	60.50
54	66.25	54.19	3.000	4.375	58.750	44	1.875	62.75
60	73.00	60.19	3.125	4.500	65.250	52	1.875	69.25
66	80.00	66.19	3.375	4.875	71.500	52	1.875	76.00
72	86.50	72.19	3.500	5.000	98.500	60	1.875	82.50
78	93.00	78.19	3.875	5.375	84.500	64	2.125	89.00
84	99.75	84.19	3.875	5.375	90.500	64	2.125	95.50
90	106.50	90.19	4.250	5.750	96.750	68	2.438	102.00
96	113.25	96.19	4.250	5.750	102.750	68	2.438	108.50

Service Rating at Atmospheric Temp - 275 PSI

Drilling Template (DT): All sizes match ANSI B16.1, Class 125 cast iron flanges.

Drilling Template (DT): 24in. and smaller match ANSI B16.5 150# standard

[§] The thickness of a 150 psi flange from which the raised face has been removed shall be no less than dimension T minus 0.06 inches.

All Dimension are in inches.

Other bores and facings available upon request

Furnished Flat Face unless otherwise specified