


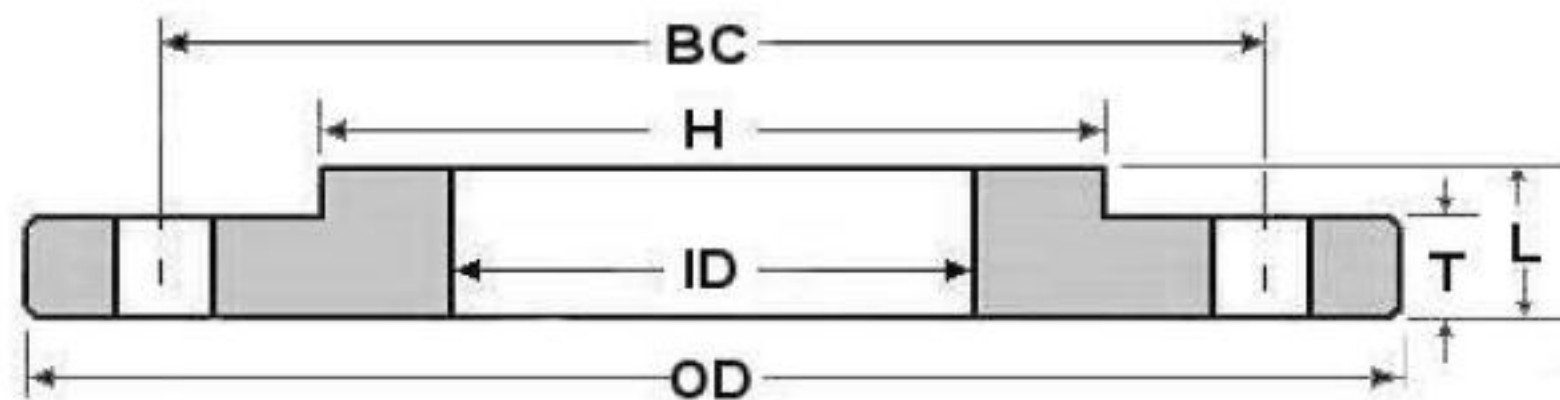

Dimensions			Thickness		Diameter of Hub	Drilling Template		
			Flange	Overall		# of Holes	Hole Diam.	BC
NPS	OD	ID	T	L	H			
4	9.00	4.57	0.500	0.875	5.312	8	0.750	7.50
5	10.00	5.66	0.562	1.250	6.312	8	0.875	8.50
6	11.00	6.72	0.562	1.250	7.562	8	0.875	9.50
8	13.50	8.72	0.562	1.250	9.688	8	0.875	11.75
10	16.00	10.88	0.688	1.250	12.000	12	1.000	14.25
12	19.00	12.88	0.688	1.250	14.375	12	1.000	17.00
14	21.00	14.19	0.750	1.250	15.750	12	1.125	18.75
16	23.50	16.19	0.750	1.250	18.000	16	1.125	21.25
18	25.00	18.19	0.750	1.250	19.875	16	1.250	22.75
20	27.50	20.19	0.750	1.250	22.000	20	1.250	25.00
22	29.50	22.19	1.000	1.750	24.000	20	1.375	27.25
24	32.00	24.19	1.000	1.750	26.125	20	1.375	29.50
26	34.25	26.19	1.000	1.750	28.500	24	1.375	31.75
28	36.50	28.19	1.000	1.750	30.500	28	1.375	34.00
30	38.75	30.19	1.000	1.750	32.500	28	1.375	36.00
32	41.75	32.19	1.125	1.750	34.750	28	1.625	38.50
34	43.75	34.19	1.125	1.750	36.750	32	1.625	40.50
36	46.00	36.19	1.125	1.750	38.750	32	1.625	42.75
38	48.75	38.19	1.125	1.750	40.750	32	1.625	45.25
40	50.75	40.19	1.125	1.750	43.000	36	1.625	47.25
42	53.00	42.19	1.250	1.750	45.000	36	1.625	49.50
44	55.25	44.19	1.250	2.250	47.000	40	1.625	51.75
46	57.25	46.19	1.250	2.250	49.000	40	1.625	53.75
48	59.50	48.19	1.375	2.500	51.000	44	1.625	56.00
50	61.75	50.19	1.375	2.500	53.000	44	1.875	58.25
52	64.00	52.19	1.375	2.500	55.000	44	1.875	60.50
54	66.25	54.19	1.375	2.500	57.000	44	1.875	62.75
60	73.00	60.19	1.500	2.750	63.000	52	1.875	69.25
66	80.00	66.19	1.500	2.750	69.000	52	1.875	76.00
72	86.50	72.19	1.500	2.750	75.000	60	1.875	82.50
78	93.00	78.19	1.750	3.000	81.250	64	2.125	89.00
84	99.75	84.19	1.750	3.000	90.500	64	2.125	95.50
90	106.50	90.19	2.000	3.250	93.750	68	2.438	102.00
96	113.25	96.19	2.000	3.250	100.000	68	2.438	108.50

Service Rating at Atmospheric Temp - 175 PSI sizes 4-12 inches.

Service Rating at Atmospheric Temp - 150 PSI sizes 14 inches & up.

Drilling Template (DT): All sizes match ANSI B16.1, Class 125 cast iron flanges.

Drilling Template (DT): 24in. and smaller match ANSI B16.5 150# standard

All Dimension are in inches.

Other bores and facings available upon request

Furnished Flat Face unless otherwise specified